



# Uniblitz® VCM-D1

Single-Channel Uni-Stable Shutter Controller



## Overview

For nearly 15 years, the Uniblitz VCM-D1 has been providing high-performance shutter control. This single-channel, uni-stable driver is versatile and proven, and it's compatible with many Uniblitz shutters. In addition to direct shutter control via the BNC inputs, shutters can also be controlled via RS-232C computer serial ports, allowing up to 8 separate driver units to be daisy-chained (810RJ cables required).

See the **VCM-D1 User Manual** for additional information regarding this device. The VCM-D1 is **RoHS compliant** and **CE certified**.

**Need Support?** Please **visit our website** or email us at **info@uniblitz.com**.

Tel: 585-385-5930 | Toll-Free: 800-828-6972 | Fax: 585-385-6004 | 803 Linden Ave. Rochester, NY 14625

Updated 11/22 | Datasheet Version 5.1 | ©2022 Vincent Associates

## What's Included

- VCM-D1 Shutter Driver
- Manual (included on flash drive)
- **710A** Cable (3.0 m)
- **501A-S7** Adapter Cable (17.8 cm)
- Line Cords (USA and Euro)
- Fuses (2) (0.25 AMP S-B)
- Key Switch Keys (2)

# Shutter Compatibility

CS	DSS	LS	NS	TS	VS	XRS
CS25		LS2			VS14	XRS6
CS35		LS3			VS25	XRS14
CS45		LS6			VS35	XRS25 <sup>1</sup>
CS65						
CS90						

Use with shutter devices other than those listed to the left is not recommended. Please contact us for further information.

<sup>1</sup> Will require two drivers for operation.

## Operation Modes

### **STD - Standard shutter operation:**

Exposure is determined by an external pulse source or switch contact closure.


### **A - Line interrupt mode:**

When a loss of line power is detected, the VCM-D1 powers down. When power is restored, it must be manually or remotely reset to resume standard operation.

### **B - DC interrupt:**


Detects a break in external switch contact. When continuity is restored, it must be manually or remotely reset to resume standard operation.

# Device Layout

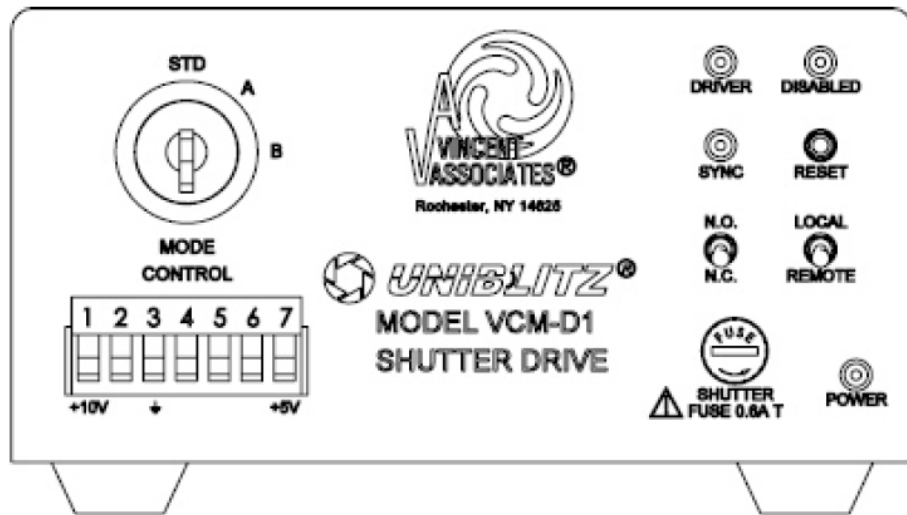

## Front Panel

LED indicators reveal shutter status at a glance, while the MODE key switch will set the unit to a specific interrupt mode not allowing an inadvertent change in setting once the key is removed. Additional interrupt functions are available at the MODE CONTROL 7-PIN pluggable connector. The AUX out-put and +5 VDC output are also available at the MODE CONTROL connector.

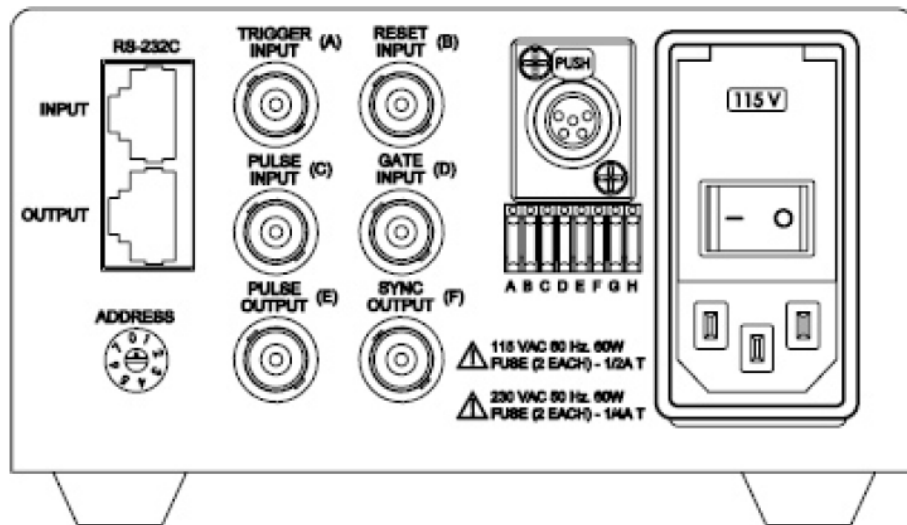

## Rear Panel

All main input/output functions can be accessed at the VCM-D1 rear panel, including the 115/230VAC input which is manually selectable. BNC connectors allow for quick termination of TTL command signals. Function switches A-F determine the active state of the BNC inputs or outputs (high or low level active). Function switch H selects HIGH/LOW energy level. Function switch G will disable the SYNC output BNC and disable the IR emitter of the synchronization circuit within the shutter used.



## Technical Specifications

Size (H x W x D)	Weight
2.73 x 5.41 x 8.18 inches (69.3 x 137.4 x 207.8 mm)	3.5 lbs (1.59 kg)

Power
115 / 230 VAC, 50 - 60 Hz, 60 W

## Product Options

**VCM-D1 ②**

Ex: VCM-D1J

**① Driver:**

- **VCM-D1**

**② Japan Modification:**

- **J:** Included
- Leave blank if not required