


Technical specifications Version 1.0

H2S-A4 Hydrogen Sulfide Sensor – 4-Electrode

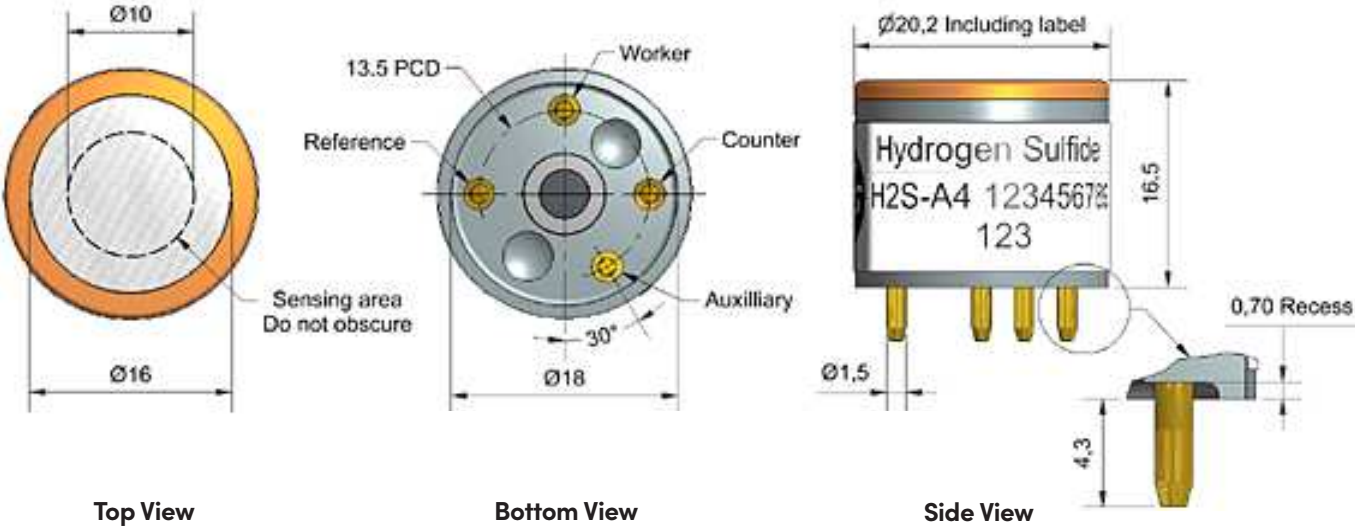

Dimensions are in millimetres (± 0.15 mm).

Performance	Sensitivity	nA/ppm at 2ppm H <sub>2</sub> S		1400 to 2200
	Response time	t90 (s) from zero to 2ppm H <sub>2</sub> S		< 60
	Zero current	nA in zero air at 20°C		-250 to 100
	Noise*	±2 standard deviations (ppb equivalent)		5
	Range	ppm H <sub>2</sub> S limit of performance warranty		50
	Linearity	ppb error at full scale, linear at zero and 10ppm H <sub>2</sub> S		< ± 0.5
	Overgas limit	maximum ppm for stable response to gas pulse		100
	*Tested with Alphasense AFE low noise circuit			
Lifetime	Zero drift	ppb equivalent change/year in lab air		< ± 100
	Sensitivity drift	% change/year in lab air, monthly test		< 20
	Operating life	months until 50% original signal (24-month warranted)		24
Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 2ppm H <sub>2</sub> S		80 to 92
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 2ppm H <sub>2</sub> S		100 to 110
	Zero @ -20°C	nA change from 20°C		30 to 50
	Zero @ 50°C	nA change from 20°C		90 to 110
Cross Sensitivity	NO <sub>2</sub> sensitivity	% measured gas @ 5ppm	NO <sub>2</sub>	< -20
	Cl <sub>2</sub> sensitivity	% measured gas @ 5ppm	Cl <sub>2</sub>	< -8
	NO sensitivity	% measured gas @ 5ppm	NO	< 3
	SO <sub>2</sub> sensitivity	% measured gas @ 5ppm	SO <sub>2</sub>	< 15
	CO sensitivity	% measured gas @ 5ppm	CO	< 1
	H <sub>2</sub> sensitivity	% measured gas @ 100ppm	H <sub>2</sub>	< 0.5
	C <sub>2</sub> H <sub>4</sub> sensitivity	% measured gas @ 100ppm	C <sub>2</sub> H <sub>4</sub>	< 0.5
	NH <sub>3</sub> sensitivity	% measured gas @ 5ppm	NH <sub>3</sub>	< 0.1
	CO <sub>2</sub> sensitivity	% measured gas @ 5%	CO <sub>2</sub>	< 0.1
Key Specifications	Temperature range	°C		-30 to 50
	Pressure range	kPa		80 to 120
	Humidity range	% rh		15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)		6
	Load resistor	Ω (AFE circuit is recommended)		33 to 100
	Weight	g		< 6

Figure 1 Sensitivity Temperature Dependence

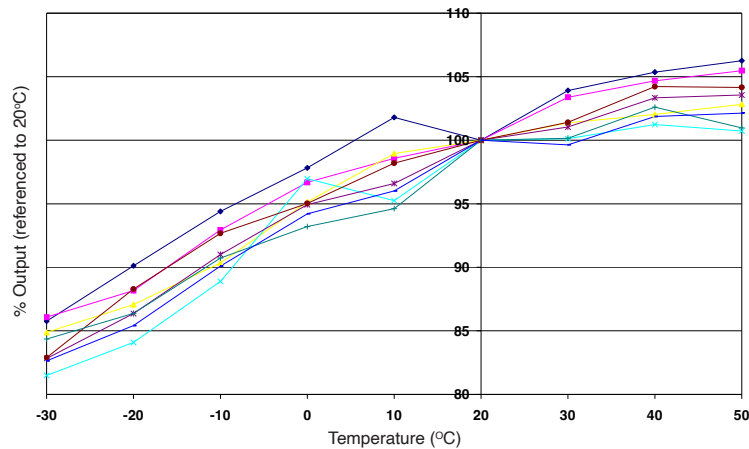


Figure 1 shows the temperature dependence of sensitivity at 2ppm H<sub>2</sub>S.  
This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence (uncorrected)

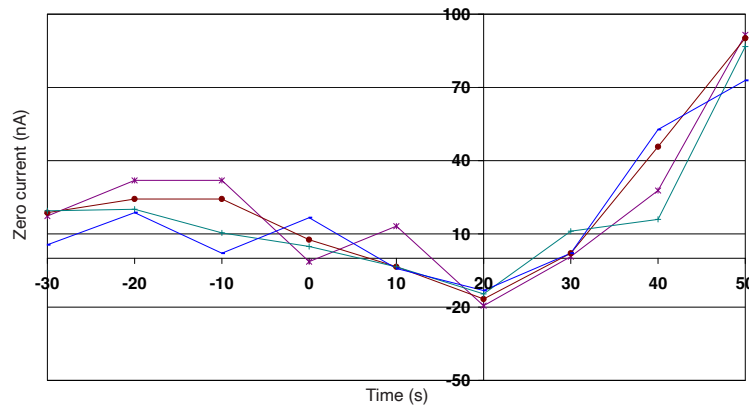


Figure 2 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.  
This data is taken from a typical batch of sensors.  
Contact Alphasense for further information on zero current correction.

Figure 3 0 to 200ppb Linearity

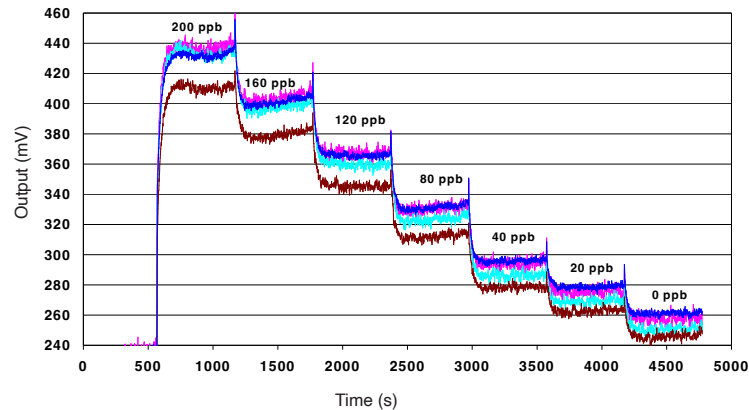


Figure 3 shows response to 200ppb H<sub>2</sub>S.  
Use of Alphasense AFE circuit reduces noise to 5ppb, with the opportunity of digital smooting to reduce noise even further.