


NO-A4 Nitric Oxide Sensor – 4-Electrode

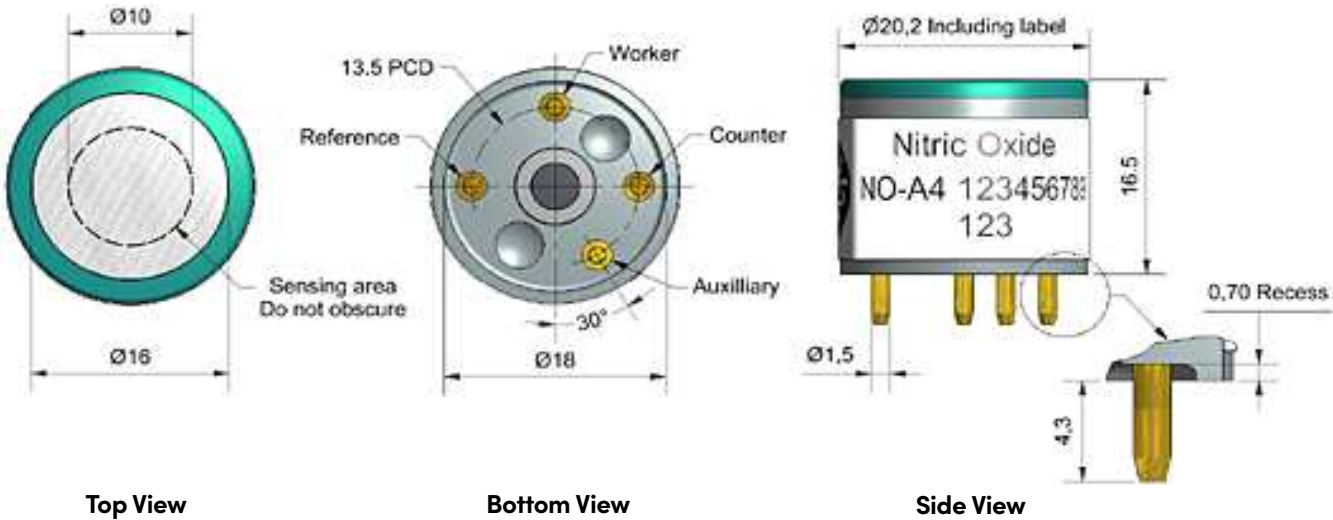

Dimensions are in millimetres (± 0.1 mm).

Performance	Sensitivity		nA/ppm in 2ppm NO		350 to 550
	Response time		t90 (s) from zero to 2ppm NO		< 25
	Zero current		nA in zero air at 20°C		10 to 150
	Noise*		± 2 standard deviations (ppb equivalent)		80
	Range		ppm NO limit of performance warranty		20
	Linearity		ppb error at full scale, linear at zero and 5ppm NO		< ± 1
	Overgas limit		maximum ppm for stable response to gas pulse		50
	*Tested with Alphasense AFE low noise circuit				
Lifetime	Zero drift		ppb equivalent change/year in lab air		0 to 50
	Sensitivity drift		% change/year in lab air, monthly test		0 to -20
	Operating life		months until 50% original signal (24-month warranted)		> 24
Environmental	Sensitivity @ -20°C		% (output @ -20°C/output @ 20°C) @ 2ppm NO		35 to 60
	Sensitivity @ 50°C		% (output @ 50°C/output @ 20°C) @ 2ppm NO		120 to 135
	Zero @ -20°C		nA change from 20°C		-10 to -50
	Zero @ 50°C		nA change from 20°C		200 to 350
Cross Sensitivity	H ₂ S	sensitivity	% measured gas @ 5ppm	H ₂ S (after 3 mins)	< 20
	NO ₂	sensitivity	% measured gas @ 5ppm	NO ₂ (after 3 mins)	< 7
	Cl ₂	sensitivity	% measured gas @ 5ppm	Cl ₂	< 4
	SO ₂	sensitivity	% measured gas @ 5ppm	SO ₂	< 4
	H ₂	sensitivity	% measured gas @ 100ppm	H ₂	< 0.1
	CO	sensitivity	% measured gas @ 5ppm	CO	< 0.3
	NH ₃	sensitivity	% measured gas @ 5ppm	NH ₃	< 0.1
	CO ₂	sensitivity	% measured gas @ 5% volume	CO ₂	< 0.1
	Halothane	sensitivity	@ 100ppm	Halothane	< 0.1
Key Specifications	Bias voltage		mV (working electrode potential is above reference electrode)		+200
	Temperature range		°C		-30 to 50
	Pressure range		kPa		80 to 120
	Humidity range		% rh continuous		15 to 85
	Storage period		months @ 3 to 20°C (stored in sealed pot)		6
	Load resistor		Ω (AFE circuit is recommended)		33 to 100
	Weight		g		< 6

Figure 1 Sensitivity Temperature Dependence

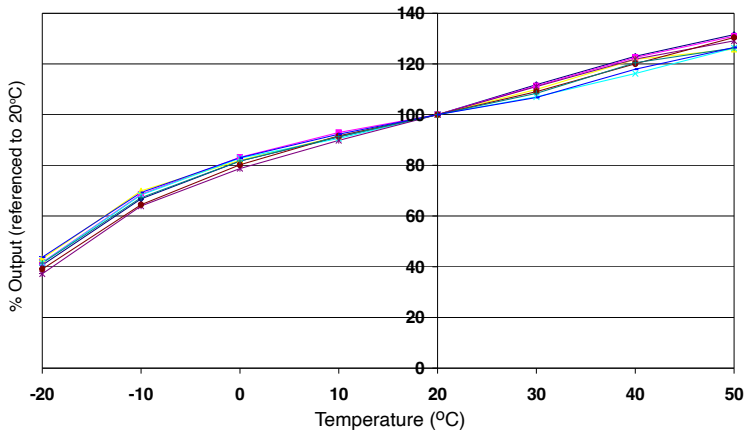


Figure 1 shows the temperature dependence of sensitivity at 2ppm NO.
This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence

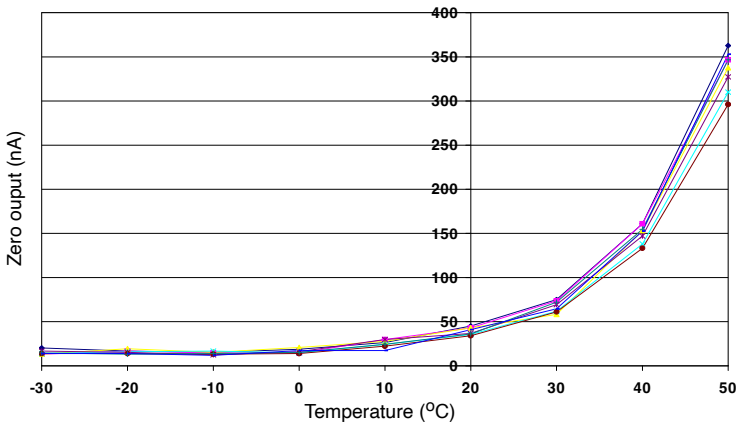


Figure 2 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.
This data is taken from a typical batch of sensors.
Contact Alphasense for further information on zero current correction.

Figure 3 Response to 200ppb NO

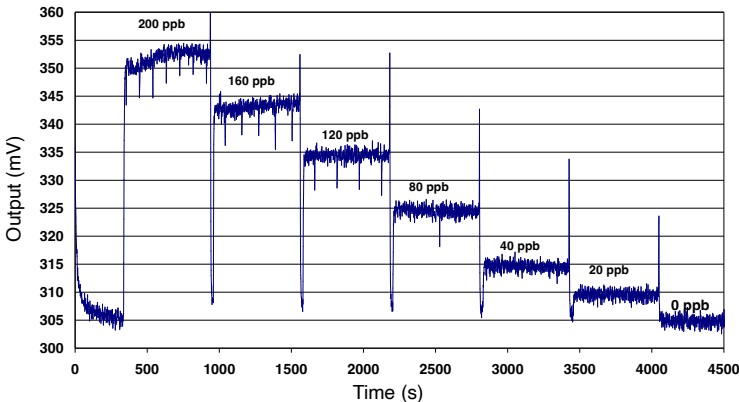


Figure 3 shows response to 200ppb NO. This was tested with the ISB circuit.

NOTE: All sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: all sensors are tested at ambient environmental conditions unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.(©ALPHASENSE LTD) Doc. Ref. NO-A4/JUN22