


## D3C Series

3 Socket MIL-Spec Connector with Custom Molded Polyurethane  
Strain Relief, Portable Measurement, 250 °F (121 °C) Max Temp



### Product Features

- ▶ TNC Connector
- ▶ Epoxied
- ▶ IP66 Rated

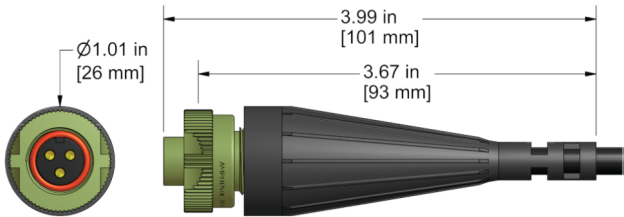

### Specifications

|                 |                       |
|-----------------|-----------------------|
| Application     | Portable Measurements |
| Max Temperature | 250°F (121°C)         |
| Connector Type  | 3 Socket MIL-Spec     |
| Pin-Out         | A = Signal (+)        |
|                 | B = Common (-)        |
|                 | C = Signal (+)        |

Built to Order