

J4R Series


4 Socket Mini-MIL Connector for CTC 4 Pin Triaxial Accelerometers,
PPS Molded, Permanent Mount, 392 °F (200 °C) Max Temp



Product Features

High Temperature Resistance up to 392 °F (200 °C)

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

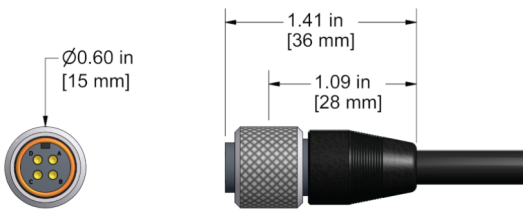

Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polyphenylene Sulfide (PPS)
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order