


M4C Series

5 Socket M12, Polyurethane Molded Strain Relief Connector, for use with 4 Conductor Cable, Portable Measurements, 250° F (121° C) Max Temp



Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC Triaxial, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

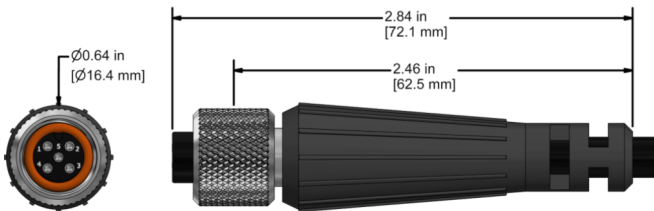

Specifications

Application	Portable Measurement
Max Temperature	250° F (121° C)
Connector Type	5 Socket M12 Connector
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane Molded
Connector Insert Material	PolyCarbonate
Rating	IP68
Pin-Out	Socket 1 = Ch. Y (+) , Red Conductor Socket 2 = Ch. X (+), Green Conductor Socket 3 = Ch. Z (+), White Conductor Socket 4 = Common (-), Black Conductor

Built to Order