

R3C Series


3 Pin MIL-Style Connector with Rubber Bending Strain Relief,
Polyurethane Molded, 250 °F (121 °C) Max Temp



Product Features

Designed to Build Extension Cables with 3
Conductor Cabling

- ▶ Mates with CTC 3 Socket MIL-Style Connectors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ Creates an IP66 Rated Seal

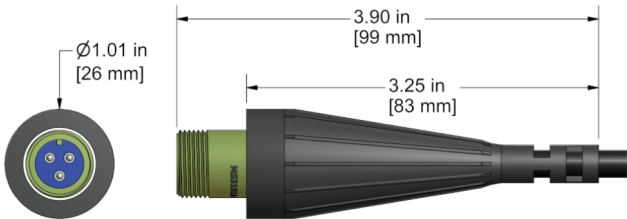

Specifications

Application	Portable Measurements, Permanent Mount
Max Temperature	250° F (121°C)
Connector Type	3 Pin MIL-Style
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

Built to Order