





The Monitor 1000ec measures gamma, and x-rays. Perfect for most applications requiring an energy compensated detector. Users can choose from readings of CPM, CPS, µSv/hr, mR/hr, or in accumulated counts. It has a red count light, a beeper that sounds with each count detected, and includes an adjustable timer, and selectable alert. With the free Observer Software for PCs and Android OS, you can automate and record readings for easy reporting!



Detector

Energy Compensated Halogen-quenched GM tube.

Operating Range

 $mR/hr - .001 (1\mu R)$ to 1000 mR/hr

uSv/hr - .01 to 10000

CPM - 0 to 450,000

CPS - 0 to 7500

Timed Count - 1 to 9,999K (9,999,000) counts

Humidity Range

10% to 70% Non-Condensing

Accuracy

Typically ±15% of reading. ±10% typical (NIST)

Alert Set Range

mR/hr .001 - 1000 and CPM 1 - 450,000 Internally mounted beeper. 70db @ 1m.

(Can be switched off for silent operation.)

Count Light

Red LED flashes with each count.

Outputs

USB and Bluetooth 4.1 with included Observer Software Family for PC and Android OS.

Size

Energy Sensitivity

450 CPM/mR/hr referenced to Cs¹³⁷


- · Detects gamma and x-rays down to 40 keV.
- · Response is flat from 40 keV up.

Display

Backlit Graphic LCD

Audio Indicator

Sounds with each count (can be switched off for silent operation)

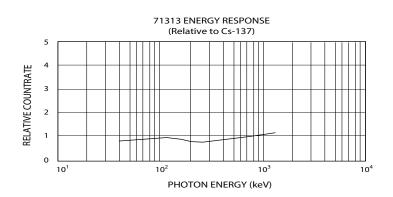

140 X 68 X 33 mm (5.5 X 2.7 X 1.3 in.)

SE INTERNATIONAL INC.





RADIATION A L E R T™

Monitor 1000 EC

Anti-Saturation

Readout will hold at full scale in radiation fields as high as 100 times the maximum reading.

Power Requirements

2 AA alkaline batteries. Approx. 500 hrs @ background.

Includes

Carrying Case, Xtreme Boot, Stand, Mini-USB Cable, Observer USB Software Download, Certificate of Conformance


Options

NIST Calibration

Limited Warranty

1 year limited warranty





USB Observer Software collects data stored in the internal memory of The Monitor 200



SE INTERNATIONAL INC.









