



Multipurpose EnergyMax Sensors

High Damage Threshold, Large Area, Laser Energy Sensors for a Wide Variety of Uses

The Multipurpose EnergyMax measure laser pulse energy over a wide range of wavelengths (190 nm to 12 μ m), beam diameters, average power levels and repetition rates. They incorporate Coherent's unique MaxBlack coating, which offers high damage resistance and mechanical durability characteristics.

These sensors are compatible with Coherent LabMax-Pro SSIM, LabMax-TOP, FieldMax-TOP, and FieldMaxII-P meters. USB and RS-232 enabled models are also available.

FEATURES

- MaxBlack coating delivers high damage threshold and mechanical durability
- Operate over the 190 nm to 12 μ m range
- Enable pulse energy measurements from 300 nJ to 2 J
- Measure single shot to 1 kHz repetition rate

APPLICATIONS

- Medical
- Scientific
- Industrial



3 1 Day Ship program: eligible for next business day shipment.

J-50MB-HE and -LE







Multipurpose EnergyMax Sensors Datasheet

MECHANICAL SPECIFICATIONS

J-25MB-HE and -LE

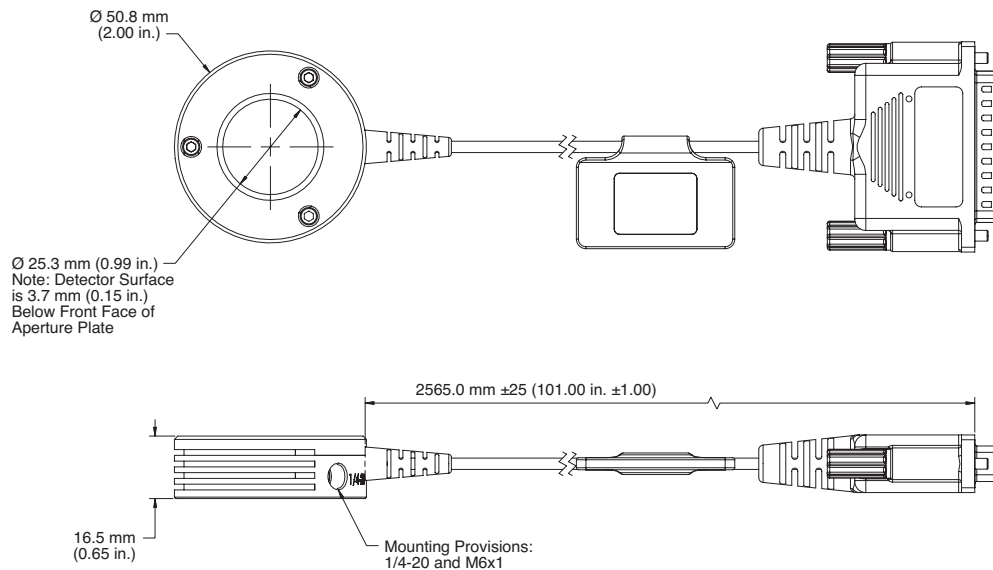

J-10MB-HE and -LE

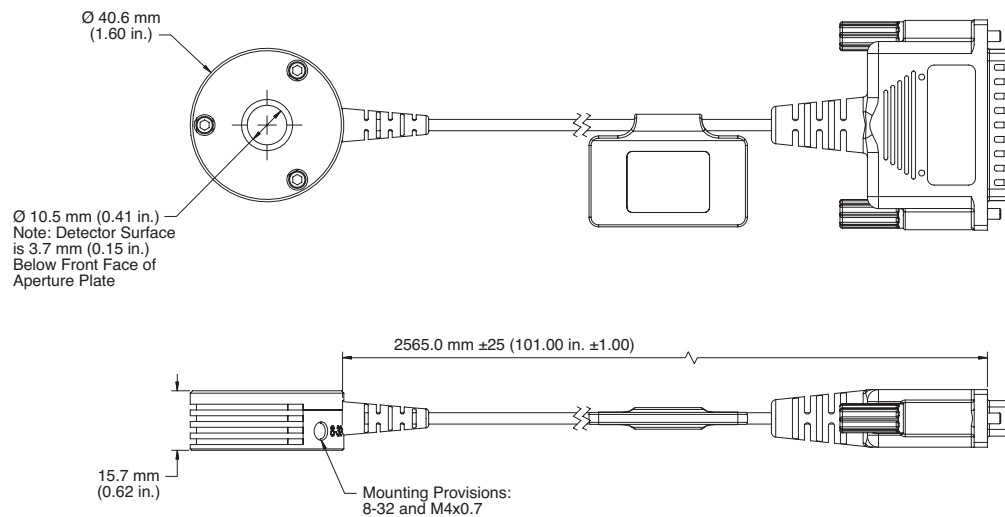

Coherent, Inc.,
5100 Patrick Henry Drive Santa Clara, CA 95054
p. (800) 527-3786 | (408) 764-4983
f. (408) 764-4646

tech.sales@coherent.com www.coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all EnergyMax Sensors. For full details of this warranty coverage, please refer to the Service section at www.coherent.com or contact your local Sales or Service Representative.
MC-026-21-0M0821 Copyright ©2021 Coherent, Inc.